

DESCRIPTION

The CW LED Wrap Luminaire is a true alternative to fluorescent. This low profile luminaire can be surface mounted or chain hung and is suitable for most locations.

SPECIFICATION FEATURES

Construction

Die formed 22 gauge galvanized steel painted high gloss white

Finish

22 gauge galvanized steel and high gloss enamel paint finish ensures maximum bonding and rust inhibition

Controls

The CW Wrap is powered by Ultrasave drivers that can be adjusted to different lumen packages by just changing the driver cable

Shielding

Positively retained frosted acrylic profile lens provide a soft but effective distribution of light

Electrical

Long Life LED System complete with electrical driver to deliver the optimal performance. LED's available in a 3500K, 4000K and 5000K with a typical CRI: 80. Rated for 94,000 hours. Electronic drivers are available in 120/277 and 347 Volt applications

Compliance

Modules and Drivers are UL recognized components and indoor luminaires are cULus listed

Warranty

5 years


Driver and Module Access

Drivers can be accessed by removing the snap in driver cover





**LED
WRAP LUMINAIRE**

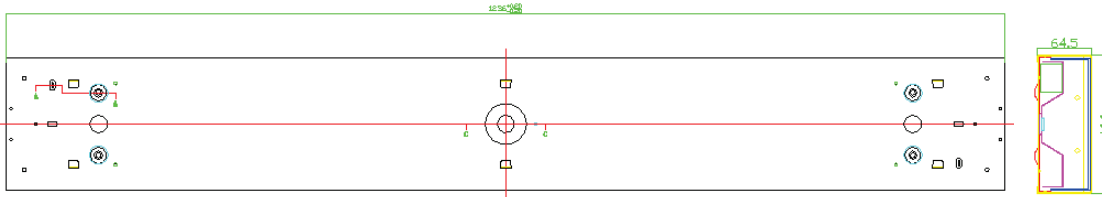powered by
ULTRASAVE



CW40LED04 / CW40LED02
Dimension
 mm | 1236(L) x 166(W) x 64.5(D)
 inch | 49"(L) x 6.5"(W) x 2.6"(D)

ORDERING CODE, ENERGY AND PERFORMANCE DATA

Model No.	Delivered Lumens (lm)	Input Watts (W)	Voltage (V)	Colour Temp. (K)	Efficacy (lm/W)	Status
 CW40LED04	4410	42	120M / 347	4000K	105	Stock
	4410	42	120M / 347	3500K / 5000K	99 / 110	MTO
	3240	31	120M / 347	3500K / 4000K / 5000K	99 / 104 / 110	MTO
	2250	22	120M / 347	3500K / 4000K / 5000K	97 / 102 / 107	MTO
 CW40LED02	3000	31	120M / 347	4000K	96	Stock
	3000	31	120M / 347	3500K / 5000K	91 / 100	MTO

OPTIONAL ACCESSORIES


Dimming Drivers (D) 120M/347V

SHIPPING DATA

Model No.	Weight
CW40LED04	2.7kg / 6lbs
CW40LED02	2.7kg / 6lbs

PHOTOMETRICS

Note: Photometric data result was obtained under prismatic wrap lens with white interior condition.

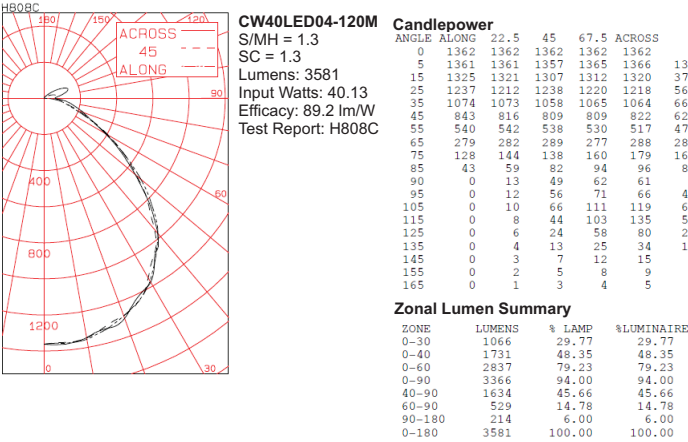

Coefficient of Utilization

Effective floor cavity reflectance = 20%

CC	80	70	50	30	10	0
WALL	70	50	30	10	50	30
RCR	10	70	50	30	10	50
0	1.181	1.181	1.181	1.141	1.141	1.141
1	1.091	1.041	1.01	0.97	1.051	1.02
2	1.00	0.93	0.88	0.83	0.98	0.91
3	0.93	0.83	0.76	0.71	0.90	0.82
4	0.86	0.76	0.68	0.62	0.84	0.74
5	0.80	0.68	0.60	0.54	0.77	0.67
6	0.74	0.61	0.53	0.48	0.71	0.60
7	0.68	0.55	0.47	0.42	0.66	0.54
8	0.63	0.50	0.43	0.37	0.61	0.49
9	0.58	0.46	0.38	0.33	0.57	0.45
10	0.54	0.42	0.34	0.29	0.53	0.41



Energy Efficient Lighting Company Limited
 331 Amber Street, Unit B, Markham, ON L3R 3J7 Canada
 Tel: 905-415-8878 • 1-855-415-8878 | Fax: 905-415-8872 • 1-855-415-8872
 Email: marketing@eelighting.ca | URL: www.eelighting.ca

Specifications and dimensions subject to change without notice.
 Consult your Energy Efficient Lighting Representative
 for availability and ordering information.